


PRO DI 10P

Passive DI Box with Stereo Input / Summed Mono Output,
MIDAS Transformer and Extended Dynamic Range

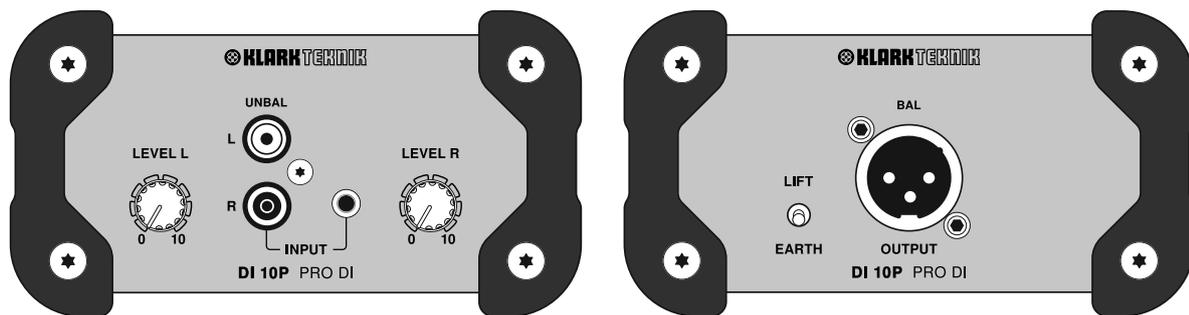

INPUTS – Connect your source audio via stereo RCA jacks or a single 1/8" TRS jack. The unused input jack can act as a loop-through output. A mono source can also be connected to one of the RCA jacks, or to the 1/8" input.

LEVEL L/R – The level of the left and right channels can be adjusted before being sent to the output jack. Normally these knobs should be set fully clockwise, but may be used to attenuate very hot signals, or to correct the balance between the channels.

OUTPUT – Send the summed inputs to a mixing console via balanced XLR cable. The output level is approximately 20 dB lower than the input signal.

EARTH LIFT – This switch may help reduce unwanted hum by removing the ground connection.

Specifications

Inputs	
Connectors	RCA unbalanced, 1/8 TRS
Impedance	7 kΩ
Outputs	
Connector	XLR, balanced
Impedance	170 Ω
System	
Frequency response	10 Hz to 91 kHz (± 1 dB)
THD + N (distortion)	<0.03% @ 1 kHz, +4 dBu
Signal-to-noise ratio	>120 dB @ 1 kHz, +4 dBu
Power requirement	Passive
Physical	
Dimensions (WxDxH)	64 x 118 x 112 mm (2.5 x 4.7 x 4.4")
Weight	0.47 kg (1.0 lbs)

LEGAL DISCLAIMER

MUSIC Group accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. MIDAS, KLARK TEKNIK, LAB GRUPPEN, LAKE, TANNOY, TURBOSOUND, TC ELECTRONIC, TC HELICON, BEHRINGER, and BUGERA are trademarks or registered trademarks of MUSIC Group IP Ltd.
© MUSIC Group IP Ltd. 2017 All rights reserved.

LIMITED WARRANTY

For the applicable warranty terms and conditions and additional information regarding MUSIC Group's Limited Warranty, please see complete details online at music-group.com/warranty.